

Fig. 1

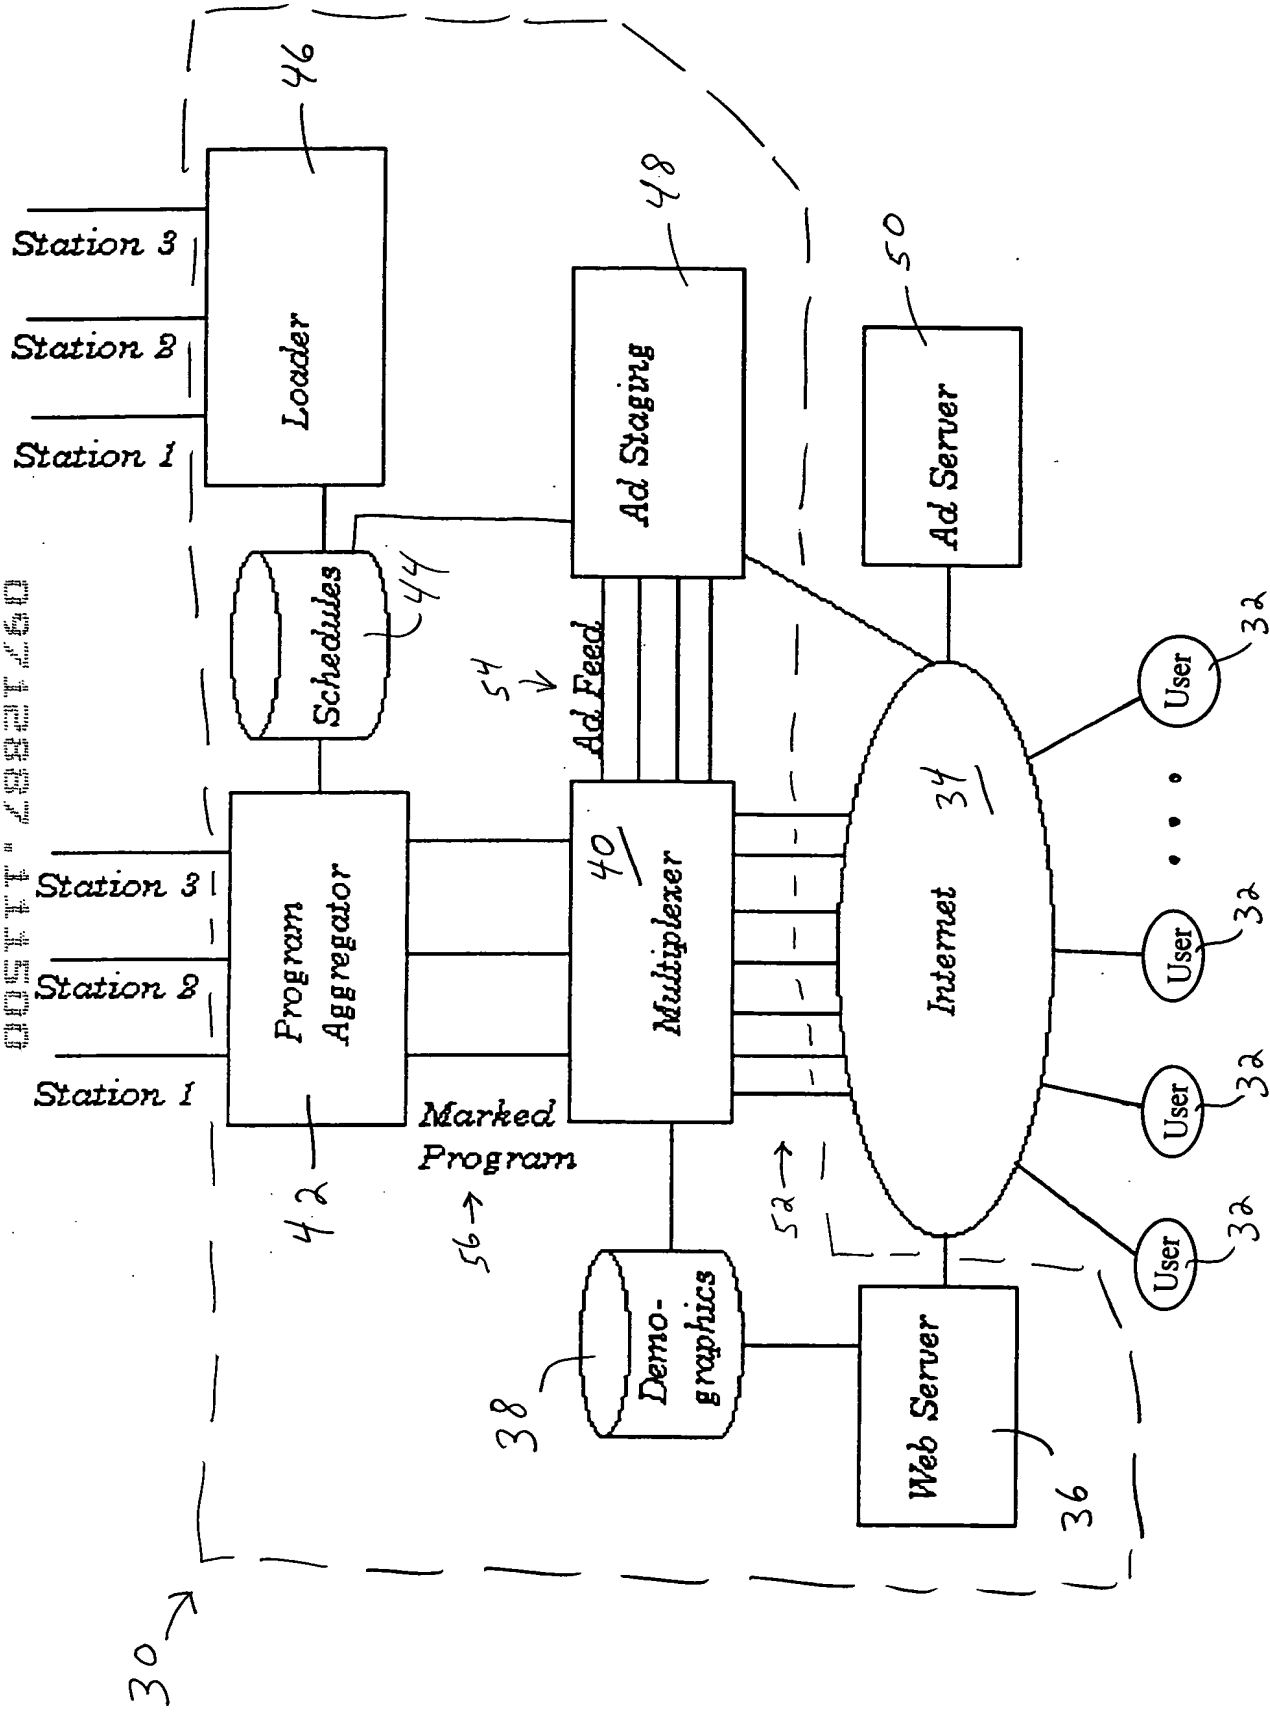


Fig. 2

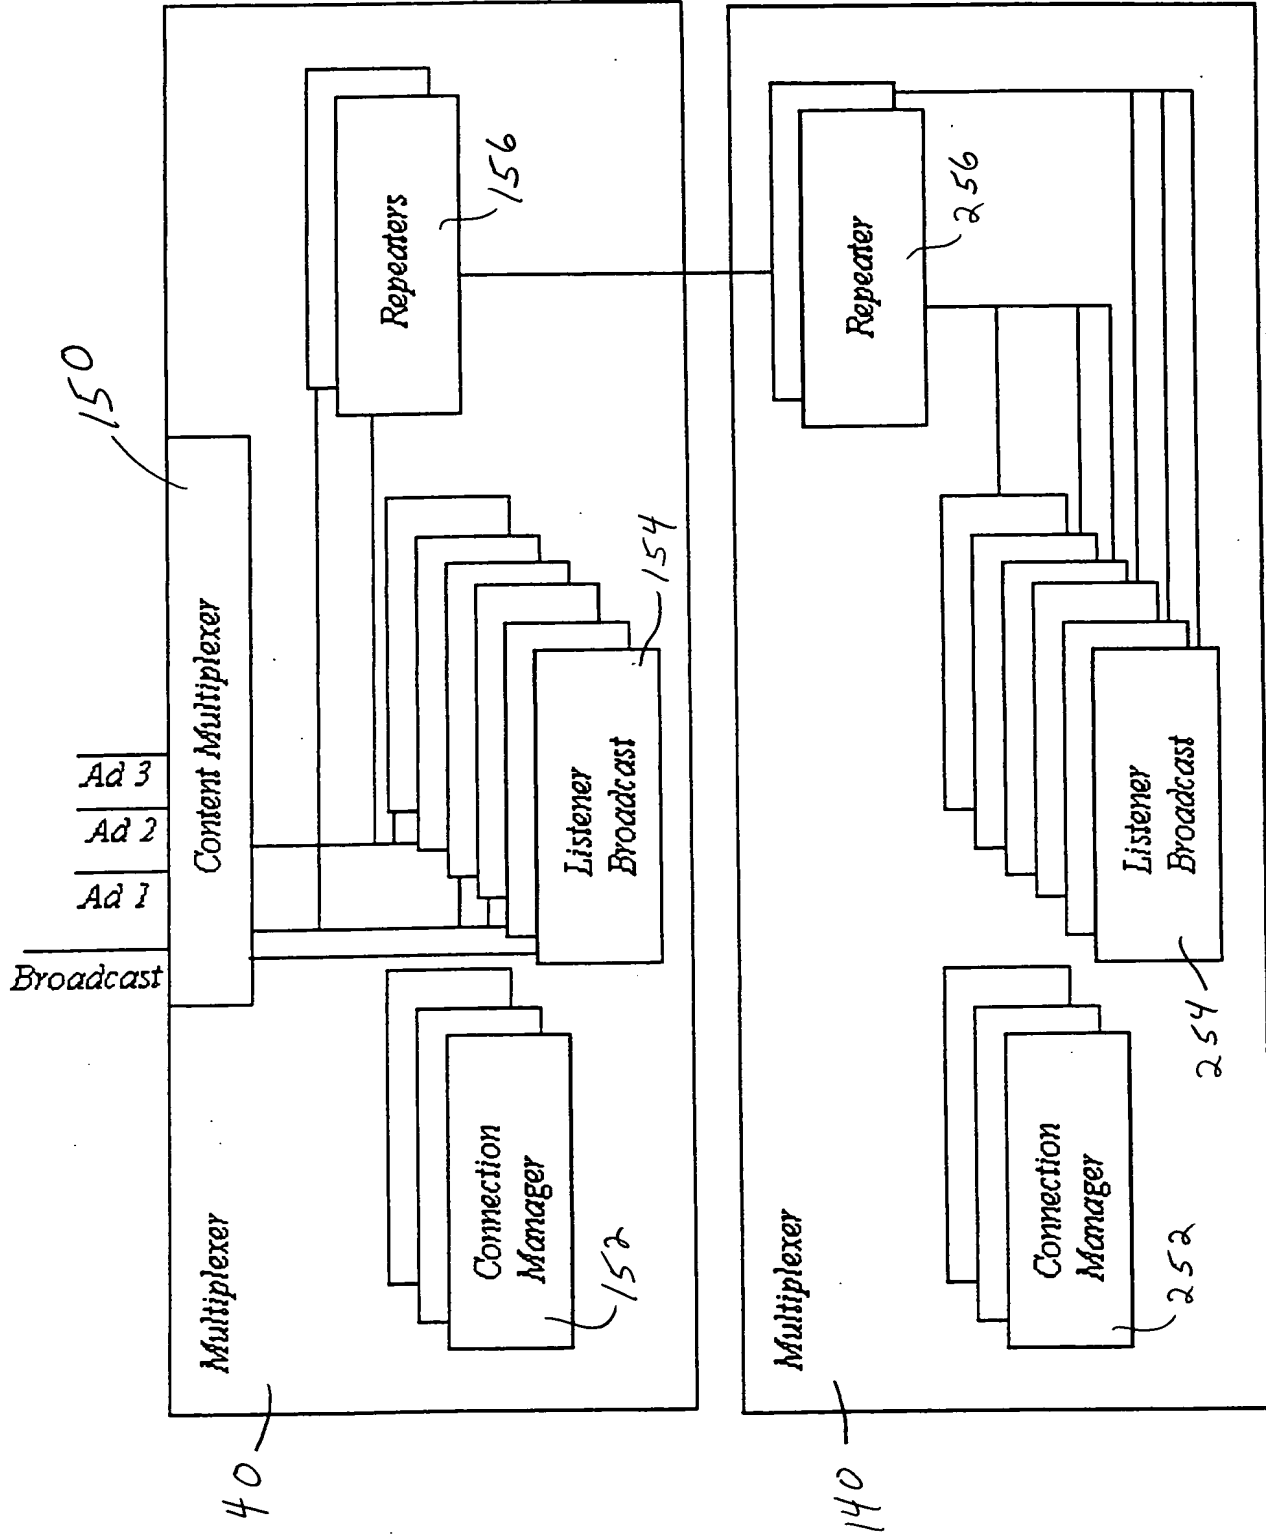


Fig. 3

60
↓

62
↓

64
↓

66
↓

68
↓

8 →
12 →
14 →
16 →

Item	Length	Value	Remarks
Marker	4	LOGN	Marks start of login request
Broadcaster ID	5		Call letter id of station
Validation	32	Encrypted	Encrypted value that must decode as valid for the current date/time, broadcaster id, broadcaster password
Marker	4	ELOG	

Fig. 4

80
↓

82
↓

84
↓

86
↓

88
↓

90 →
92 →
94 →
96 →

Item	Length	Value	Remarks
Marker	4	LOGN	Marks start of login request
Broadcaster ID	5		Call letter id of station
Validation	32	Encrypted	Encrypted value that must decode as valid for the current date/time, broadcaster id, broadcaster password
Marker	4	ELOG	

Fig. 5

100
↓

102
↓

104
↓

106
↓

108
↓

0 →
2 →
4 →
6 →
8 →
10 →
12 →
14 →
16 →
18 →
20 →
22 →
24 →
26 →
28 →
30 →
32 →
34 →
36 →
38 →
40 →
42 →
44 →
46 →
48 →
50 →
52 →
54 →
56 →
58 →
60 →
62 →
64 →
66 →
68 →
70 →
72 →
74 →
76 →
78 →
80 →
82 →
84 →
86 →
88 →
90 →
92 →
94 →
96 →
98 →
100 →

Item	Length	Value	Remarks
Marker	4	DATA	Marks start of new command
Broadcaster ID	5		Call letter id of station
Command Type	1	1-3	1 = Insert 2=Update 3=Delete
Record ID	10		Record identifier set by schedule loader program. Returned on insert command request.
Start Date	10	MM/DD/YYYY	Date for ad insert
Time	11	HH:MM:SS:SS	Time to start ad
Ad identifier	20		Record identifier for ad media located on ad server
Results	1	0-1	0 = failed 1 = passed
Marker	3	DEND	Marks end of command

Fig. 6